


Rear Camber Adjustment

Tools Required

[J 45845](#) Caster and Camber Adjusting Tool

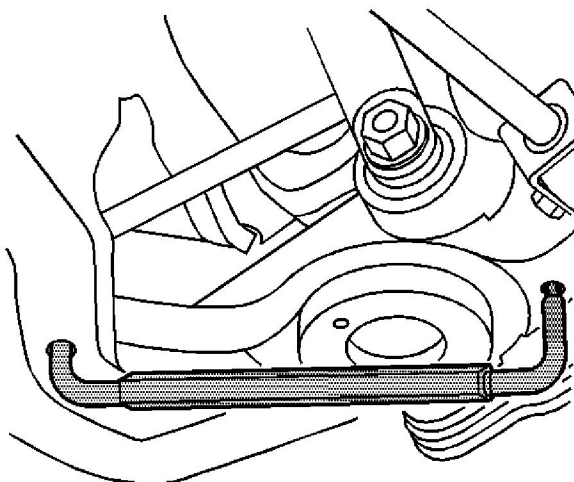

1. Install [J 45845](#) to the lower control arm and the frame.
2. Loosen the lower control arm to frame bolt.

Notice: Refer to [Fastener Notice](#) in the Preface section.

3. Adjust the camber angle by turning the turnbuckle on [J 45845](#) until the specifications have been met.

Tighten

Tighten the bolt to 135 N·m (96 lb ft).

4. Verify that the camber is still with specifications. Refer to [Wheel Alignment Specifications](#) .
5. Adjust the rear toe. Refer to [Rear Toe Adjustment](#) .